




# BROWNING BEARING COMPANY

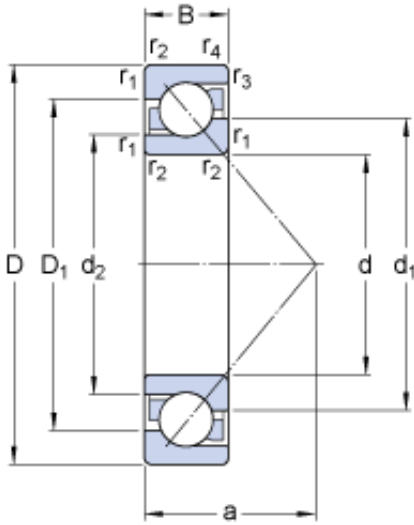

20 mm x 52 mm x 15 mm skf 7304 bep bearing

Bearing No. 7304 bep

7304 bep Bearing 2D drawings and 3D CAD models

Size	52x20x15 mm
Bore Diameter	52 mm
Outer Diameter	20 mm
Width	15 mm
d	20 mm
D	52 mm
B	15 mm
d <sub>1</sub>	33.15 mm
d <sub>2</sub>	26.75 mm
D <sub>1</sub>	40.5 mm
a	22.8 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
d <sub>a</sub> - min.	27 mm
D <sub>a</sub> - max.	45 mm
D <sub>b</sub> - max.	47.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	17.4 kN
Basic static load rating - C <sub>0</sub>	9.5 kN
Fatigue load limit - P <sub>u</sub>	0.4 kN
Reference speed	16000 r/min
Limiting speed	16000 r/min
Calculation factor - k <sub>r</sub>	0.1
Calculation factor - k <sub>a</sub>	1.6



## BROWNING BEARING COMPANY

Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y <sub>0</sub>	0.52
Calculation factor - Y <sub>1</sub>	0.55
Calculation factor - Y <sub>2</sub>	0.93
Calculation factor - X	0.35
Calculation factor - Y <sub>0</sub>	0.26
Calculation factor - Y <sub>1</sub>	
Calculation factor - Y <sub>2</sub>	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.143
EAN	7316576633751
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	20MM Bore; 52MM Outside Diameter; 15MM



## BROWNING BEARING COMPANY

	Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7304 BEP
Weight / LBS	0.3
Bore	0.787 Inch   20 Millimeter
Width	0.591 Inch   15 Millimeter
Outside Diameter	2.047 Inch   52 Millimeter
bore diameter:	20 mm
radial static load capacity:	9.5 kN
outside diameter:	52 mm
cage material:	Nylon
overall width:	15 mm
outer ring width:	15 mm
contact angle:	40 °
maximum rpm:	16000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	Not Rated
closure type:	Open
fillet radius:	1 mm
radial dynamic load capacity:	17.4 kN
series:	73



## BROWNING BEARING COMPANY

$d_1$	33.15 mm
$d_2$	26.75 mm
$D_1$	40.5 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	27 mm
$D_a$ max.	45 mm
$D_b$ max.	47.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	17.4 kN
Basic static load rating $C_0$	9.5 kN
Fatigue load limit $P_u$	0.4 kN
Calculation factor A	0.00191
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.14 kg